TOTO®

MS854114EL(G)(R)

Eco UltraMax® One-Piece Toilet, ADA Height, 1.28GPF

FEATURES

- E-Max[®] flushing system, high efficiency (1.28GPF/4.8LPF)
- CEFIONTECT® ceramic glaze minimizes waste from sticking to porous ceramic surfaces
- One-piece decorative toilet with high-profile tank
- Elongated front bowl with SoftClose® seat (SS114)
- 12" Rough-in
- ADA compliant (when installed with trip lever located on the approach side)
- Chrome trip lever

MODELS

- MS854114ELG
 ADA height toilet with elongated bowl,
 CeFiONtect and SoftClose seat (SS114)
- MS854114EL ADA height toilet with elongated bowl and SoftClose seat (SS114)
- MS854114ELR#01
 ADA height toilet with elongated bowl, right hand trip lever and SoftClose seat (SS114)

COLORS/FINISHES

Standard
 #01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece low consumption E-Max flushing system toilet shall be 1.28GPF/4.8LPF. Toilet shall be of elongated front bowl (MS854) with a high-profile tank and SoftClose seat. Toilet shall be ADA compliant (when installed with trip lever located on the approach side). Toilet shall have chrome trip lever. Toilet shall have optional CEFIONTECT ceramic glaze. Toilet shall be TOTO Model MS854114EL







CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)
- Complies with CA Prop 65 warning requirements







Eco UltraMax® One-Piece Toilet, ADA Height, 1.28GPF

SPECIFICATIONS

Water Use
 1.28 GPF/4.8 LPF

Flush System E-Max®
 Min. Water Pressure 8 psi (static)
 Water Surface 10-1/4" x 8-1/4"

Trap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-3/8"

• Warranty One Year Limited Warranty

• Material Vitreous china

Shipping Weight MS854114EL(G) 117 lbs.


Shipping Dimensions 32" L x 20"W x 17-3/4" H1

x 28-3/4" H2


INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.



To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

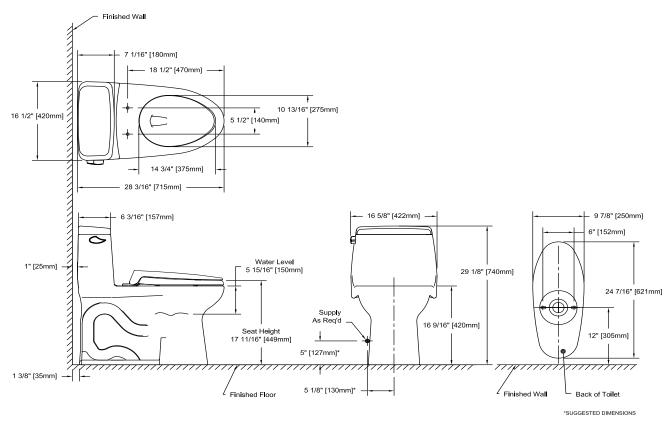

TOTO_®

These dimensions and specifications are subject to change without notice